
# City of St. Louis Water Division Consumer Confidence Report 2019





City of St. Louis Water Division – Department of Public Utilities 1640 S. Kingshighway – St. Louis, MO 63110-4399 314-663-9000 Curtis B. Skouby P.E. – Director of Public Utilities Curtis B. Skouby P.E. – Water Commissioner stlwater.com

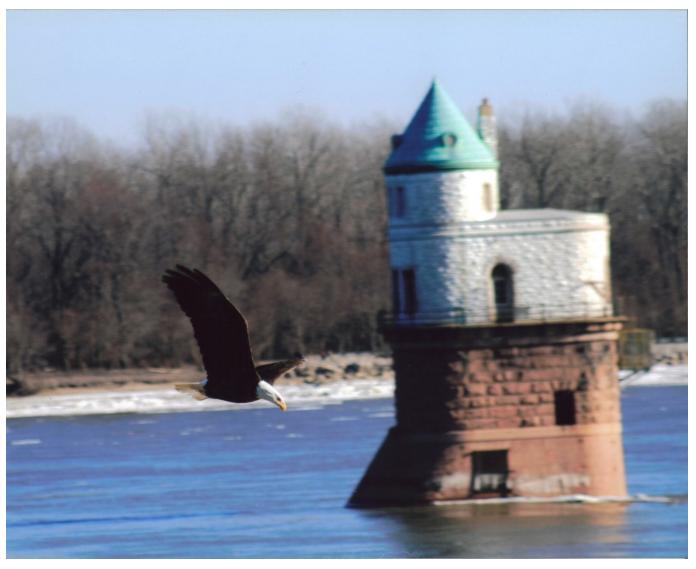

# CITY OF ST. LOUIS Water Quality Report 2019

In compliance with the Safe Drinking Water Act, the City of St. Louis Water Division is delivering this Water Quality Report to all its customers who receive water bills. We ask that landlords, employers, and anyone else who receives the water bill for other water users share this report with them. To obtain additional copies, call (314) 771-2255.

The web address of the CCR on the internet is: <u>http://www.stlwater.com/confidence.php</u>. The report summarizes information that your water system collects to comply with regulations, including information on water from the Missouri and Mississippi Rivers, the levels of detected contaminants, and compliance with drinking water rules.

### ST. LOUIS CITY WATER - A HISTORY OF EXCELLENCE

The Water Division is a branch of the St. Louis City government's Department of Public Utilities. Since 1835, we have been dedicated to supplying the highest quality water to our customers. We are proud to say that in **2019**, our water met or exceeded the standards set by the U.S. Environmental Protection Agency and the Missouri Department of Natural Resources. In fact, we have never violated a water quality regulation in 115 years of testing.

Our scientists constantly monitor and test the water for over 150 possible contaminants. We analyze the water where it enters the plant as raw river water, throughout the treatment process, and at multiple points throughout the city. The frequency and thoroughness of these tests exceed federal regulations for water quality monitoring. Water quality monitoring of St. Louis City water in 2019 indicated that no compounds were detected above the allowable levels set by federal and state regulations.

The City of St. Louis Water Division is proud to be a charter member of the Partnership for Safe Water. In 1994, this organization was formed by 187 surface water utilities, several drinking water organizations, including the American Water Works Association and the Environmental Protection Agency. The Partnership's goal is to provide a new measure of safety to millions of Americans by improving water quality nationwide.

#### WHERE DOES THE WATER COME FROM?

The City of St. Louis Water Division has two water treatment plants. The Howard Bend Plant draws water from the Missouri River. The Chain of Rocks Plant is located on the Mississippi River, south of the confluence of the Missouri and Mississippi Rivers. The water reaching our intakes at the Chain of Rocks Plant is primarily Missouri River water because the two rivers have not fully mixed when the water reaches the plant. Together, the two plants produce an average of 111 million gallons of water each day.

#### SOURCE WATER ASSESSMENT INFORMATION

In 2004, the Missouri Department of Natural Resources (DNR) conducted a source water assessment to determine susceptibility of our source water to contamination. You can acquire the complete results by calling DNR at 1-800-361-4827 or the information can be viewed on the internet at: <u>https://drinkingwater.missouri.edu</u>. Our system I.D. is: 6010715. The assessment has determined that our river water source is susceptible due to the presence of potential contaminant sources. The City of St. Louis employs all available measures at its disposal to remove contamination at intakes and during the treatment process. The drinking water produced at our facilities consistently meets or exceeds all Safe Drinking Water Standards.

### WHAT ABOUT CONTAMINANTS?

All drinking water, including bottled water, may reasonably be expected to contain at least small amounts of some contaminants. The presence of contaminants does not necessarily indicate that water poses a health risk. More information about contaminants and potential health effects can be obtained by calling the Environmental Protection Agency's Safe Drinking Water Hotline (800-426-4791).

### GIARDIA AND CRYPTOSPORIDIUM

Giardia and Cryptosporidium are microscopic parasites that, when ingested, can result in fever, diarrhea, and other gastrointestinal complications. These organisms are found in all rivers and streams and come from animal wastes in the watershed. They are removed by effective treatment including deactivation with chlorine and precipitative softening, sedimentation, flocculation and filtration. Previous monitoring performed monthly did not detect any Cryptosporidium or Giardia in samples collected after the first stage of our multi-stage, multiple barrier treatment process at either of the City's water purification plants. Prior monitoring showed that neither cysts nor oocysts were detected in our finished water.

### HEALTH RISKS

Some people may be more vulnerable to contaminants in drinking water than the general population. Immuno-compromised persons can be particularly at risk from infections; such as persons with cancer undergoing chemotherapy, persons who have undergone organ transplants, people with HIV/AIDS or other immune system disorders, some elderly individuals, and infants. These people should seek advice about drinking water from their health care providers. EPA/Center for Disease Control guidelines on appropriate means to lessen the risk of infection by Cryptosporidium are available from the Safe Drinking Water Hotline (800-426-4791).

### LEAD IN DRINKING WATER

The City of St. Louis Water Division has optimized its treatment process so that the corrosion of internal plumbing is highly unlikely. However, if present, elevated levels of lead can cause serious health problems, especially for pregnant women and young children.

Lead in drinking water is primarily from materials and components associated with service lines and home plumbing. The City of St. Louis Water Division is responsible for providing high quality drinking water, but cannot control the variety of materials used in plumbing components. When your water has been sitting for several hours, you can minimize the potential for lead exposure by flushing your tap for 30 seconds to 2 minutes before using water for drinking or cooking. If you are concerned about lead in your water, you may wish to have your water tested. Information on lead in drinking water, testing methods, and steps you can take to minimize exposure is available from the Safe Drinking Water Hotline or at <a href="http://www.epa.gov/safewater/lead">http://www.epa.gov/safewater/lead</a>.

# FLUORIDATION

Since 1953, in accordance with St. Louis City Revised Code Chapter 11.26, the City of St. Louis Water Division has been fluoridating our customers' drinking water. Our goal was to provide fluoridated drinking water to a target level of 1 mg/L. In December 2010, the United States Department of Health and Human Services released a report recommending that fluoridation levels in drinking water should be set at 0.7 mg/L. In January 2012, the City of St. Louis Water Division under the direction of the City of St. Louis Health Department reduced the fluoridation goal to 0.6 mg/L.

### **READING THE TABLES**

The first table reports only regulated substances that have been found in measurable quantities in St. Louis City's finished drinking water. While we test for 150 possible contaminants, traces of only **15** were detected in **2019**. The results of the detected contaminants are listed in the table. **All contaminants were detected in concentrations well below safe and acceptable limits.** 

The second table lists the Highest Locational Running Annual Average (LRAA) for Disinfection Byproducts at each of our distribution monitoring locations.

In 2019, the City of St. Louis Water Division participated with other large utilities across the country in the UCMR4 (Unregulated Contaminant Monitoring Rule 4). More information about the UCMR4 can be found at this website: <u>https://www.epa.gov/sites/production/files/2017-03/documents/ucmr4-fact-sheet-general.pdf</u>. With the exceptions of Manganese and the HAA Disinfection Byproducts, the remaining contaminants were not detected. The third table contains the HAA results from the UCMR4. The Manganese results were included with our results listed in the Optional Monitoring Table.

The Fourth table, "Optional Monitoring (not required by EPA)", lists non-regulated substances whose concentrations have been of interest by consumers.

# DATA FOR 2019 WATER QUALITY REPORT - City of St. Louis Water Division - MO6010715

Detected Contaminants (units)	MCL	MCLG	Maximum Level Detected	Range	Major Sources of Contaminants	
Inorganic Compounds						
Antimony (Total, µg/L)	6	6	0.24 0.23 - 0.24		Discharge from petroleum refineries; fire retardants; ceramics; electronics; solder	
Arsenic (µg/L)	10	0	0.65	0.53 - 0.65	Erosion of natural deposits	
Barium (mg/L)	2	2	0.0118	0.0099 - 0.0118	Erosion of natural deposits	
Chromium (Total, µg/L)	100	100	1.67	1.62 – 1.67	Erosion of natural deposits, Industrial discharge	
Selenium (µg/L)	50	50	1.58	1.50 - 1.58	Erosion of natural deposits, Industrial discharge	
Fluoride (mg/L)	4	4	1.02	0.35 - 1.02	Water additive for dental health	
Nitrate+Nitrite (as mg/L N)	10	10	1.09	1.07 – 1.09	Natural Deposits; Fertilizer runoff	
Lead (µg/L)*	AL = 15	0	90 <sup>th</sup> Percentile = 0.99	Number of samples above AL=0	Corrosion of household plumbing	
Copper (mg/L)*	AL = 1.3	1.3	90 <sup>th</sup> Percentile = 0.0202	Number of samples above AL=0	Corrosion of household plumbing	
Organic (Synthetic) Compo	unds					
Atrazine (µg/L)	3	3	1.35	ND – 1.35	Herbicide runoff from row crops	
Disinfectant/Disinfection By	products – See addition	al table for Tota	l Trihalomethanes a	nd Haloacetic Acids (	5) on page 5	
Chloramine (mg/L)	MRDL = 4	MRDLG = 4	3.39	2.10 - 3.39	Disinfectant used to treat water	
Total Trihalomethanes (µg/L)	80	N/A	21.1	8.1 - 21.1	By-product of disinfection	
Haloacetic Acids (5) (µg/L)	60	N/A	42.7	14.3 - 42.7	By-product of disinfection	
Microbiological Data						
Total Coliform Bacteria (% positive samples)	5% of monthly samples positive	0	Highest Month: 0.00% Annual Average: 0.00%		Naturally present in the environment	
Total Organic Carbon	TT (Required min. 15% TOC removal from source water)	N/A	5.43	2.47 - 5.43	Naturally present in the environment	
(mg/L)			Annual Avg. Perce	ent removal = $32.9\%$		
	TT (1NTU)**	TT (1NTU)**		= 0.12 (March)		
Turbidity (NTU)**	TT = 95% of monthly samples <0.3NTU	N/A	Percentage of samples below 0.3NTU = 100%		Soil runoff	
Radioactive Contaminants					1	
Gross Alpha Particle Activity, Total (pCi/L) Year 2013*	15	0	Not Detected	N/A	Erosion of natural deposits	
Total Uranium (µg/L) Year 2013*	30	0	Not Detected	N/A	Erosion of natural deposits	

**Disinfection Byproducts by Location** 

Disinfection Byproducts	Sample Point	Highest LRAA	Range of Sampled Result(s) (low – high)	Unit	MCL	MCLG	Typical Source
(HAA5)	DBPDUAL-02	29.2	15.0 - 33.8	ppb	60	0	By-product of disinfection
(HAA5)	DBPDUAL-03	32.6	16.2 - 42.7	ppb	60	0	By-product of disinfection
(HAA5)	DBPDUAL-04	31.7	16.9 - 36.5	ppb	60	0	By-product of disinfection
(HAA5)	DBPDUAL-06	29.5	14.3 - 34.8	ppb	60	0	By-product of disinfection
(HAA5)	DBPDUAL-08	31.3	18.9 - 39.1	ppb	60	0	By-product of disinfection
(HAA5)	DBPDUAL-10	34.1	17.4 - 38.5	ppb	60	0	By-product of disinfection
TTHM	DBPDUAL-02	17.5	8.5 - 20.4	ppb	80	0	By-product of disinfection
TTHM	DBPDUAL-03	18.7	13.9 - 20.9	ppb	80	0	By-product of disinfection
TTHM	DBPDUAL-04	18.6	12.8 - 20.4	ppb	80	0	By-product of disinfection
TTHM	DBPDUAL-06	17.9	8.1 - 21.1	ppb	80	0	By-product of disinfection
TTHM	DBPDUAL-08	18.8	12.2 - 18.9	ppb	80	0	By-product of disinfection
TTHM	DBPDUAL-10	17.8	14.3 - 20.5	ppb	80	0	By-product of disinfection

UCMR4 Disinfection Byproducts Results (Haloacetic Acids)

Disinfection Byproducts	Sample Point	Highest LRAA	Range of Sampled Result(s) (low – high)	Unit	MCL	MCLG	Typical Source
(HAA5)	DBPDUAL-02	18.9	10.3 - 36.5	ppb	60	0	By-product of disinfection
(HAA5)	DBPDUAL-03	23.5	12.1 - 39.2	ppb	60	0	By-product of disinfection
(HAA5)	DBPDUAL-04	22.3	12.0 - 38.9	ppb	60	0	By-product of disinfection
(HAA5)	DBPDUAL-06	21.3	11.5 - 40.7	ppb	60	0	By-product of disinfection
(HAA5)	DBPDUAL-08	22.8	12.0 - 36.3	ppb	60	0	By-product of disinfection
(HAA5)	DBPDUAL-10	23.1	12.6 - 39.3	ppb	60	0	By-product of disinfection
(HAABr6)	DBPDUAL-02	2.5	1.9 -2.8	ppb	N/A	N/A	By-product of disinfection
(HAABr6)	DBPDUAL-03	2.4	1.6 - 2.9	ppb	N/A	N/A	By-product of disinfection
(HAABr6)	DBPDUAL-04	2.3	1.4 - 2.9	ppb	N/A	N/A	By-product of disinfection
(HAABr6)	DBPDUAL-06	2.5	1.9 - 2.8	ppb	N/A	N/A	By-product of disinfection
(HAABr6)	DBPDUAL-08	2.4	1.6 - 2.9	ppb	N/A	N/A	By-product of disinfection
(HAABr6)	DBPDUAL-10	2.5	1.6 - 3.0	ppb	N/A	N/A	By-product of disinfection
(HAA9)	DBPDUAL-02	21.3	12.7 -38.9	ppb	N/A	N/A	By-product of disinfection
(HAA9)	DBPDUAL-03	25.8	14.6 - 41.5	ppb	N/A	N/A	By-product of disinfection
(HAA9)	DBPDUAL-04	24.5	14.4 - 40.9	ppb	N/A	N/A	By-product of disinfection
(HAA9)	DBPDUAL-06	23.7	13.9 - 43.3	ppb	N/A	N/A	By-product of disinfection
(HAA9)	DBPDUAL-08	25.1	14.4 - 38.8	ppb	N/A	N/A	By-product of disinfection
(HAA9)	DBPDUAL-10	25.5	15.1 - 41.9	ppb	N/A	N/A	By-product of disinfection

6 -

Secondary Contaminants	MCL	Average Level Detected	Range				
Alkalinity, Total (mg/L)	N/A	51	41 - 69				
Aluminum (mg/L)	N/A	0.0016	0.0005 - 0.0016				
Calcium (mg/L)	N/A	31.4	21.2 - 69.6				
Chloride (mg/L)	250	22.4	18.9 – 29.7				
Conductivity (µS/cm)	N/A	442	298 - 619				
Hardness, Total (mg/L as CaCO <sub>3</sub> )	N/A	140	97 - 220				
Iron (mg/L)	0.3	N.D.	N.D.				
Magnesium (mg/L)	N/A	15.0	2.9 - 32.3				
Manganese (µg/L)	50	0.22	N.D. – 0.71				
Metolachlor (µg/L)	N/A	0.40	0.36 – 0.44				
Nickel (µg/L)	N/A	1.64	1.57 – 1.64				
Non Carbonate Hardness (mg/L as CaCO <sub>3</sub> )	N/A	89	61 - 220				
<b>Optional Monitoring (not required by EPA) cont.</b>							
Secondary Contaminants	MCL	Average Level Detected	Range				
рН	N/A	9.42	8.32 - 10.00				
Potassium (mg/L)	N/A	5.40	4.19 - 6.39				
Sodium (mg/L)	N/A	34.6	20.9 - 51.8				
Solids, Total Dissolved (TDS) (mg/L)	500	288	221 - 373				
Sulfate (mg/L)	250	123	85.5 - 173				

**Optional Monitoring (not required by EPA)** 

ŀ

ſ

#### **DEFINITIONS:**

(AL) Action Level: The concentration of a compound that triggers a treatment technique or other requirement that a water system must follow.

(DL) Detection Limit: The smallest amount of a compound that can accurately be measured by the test method used. (LRAA): Locational Running Annual Average

(MCL) Maximum Contaminant Level: The highest level of a compound allowed in drinking water.

(MCLG) Maximum Contaminant Level Goal: The level of a contaminant in drinking water below which there is no known risk to health.

(MRDL) Maximum Residual Disinfectant Level: The highest level of a disinfectant allowed in drinking water.

(MRDLG) Maximum Residual Disinfectant Level Goal: The level of a drinking water disinfectant below which there is no known or expected risk to health.

(µg/L) Microgram per Liter: One part per billion or 1 cent in \$10,000,000.

(mg/L) Milligram per Liter: One part per million or 1 cent in \$10,000.

(mg/L as CaCO<sub>3</sub>): Expressed as the equivalent in mg/L of Calcium Carbonate.

(as N mg/L): Expressed as the total amount of Nitrogen in mg/L.

(pCi/L) Picocuries per liter is a measure of radioactivity in water.

**(ND)** None Detected: The concentration of a compound is less than the smallest amount that can be measured by the test method used.

(N/A) Not Applicable: This heading is not needed for this contaminant.

**(NTU)** Nephelometric Turbidity Units: The measurement of the amount of light scattered when a beam of light is directed through a water sample.

Range: The highest and lowest results detected for the contaminant.

(TOC): Total Organic Carbon.

(TT) Treatment Technique: A required process intended to reduce the level of a contaminant in drinking water.

\*The State of Missouri has reduced monitoring requirements for certain contaminants to less than once per year because the concentrations of these contaminants are not expected to vary significantly from year to year. The Lead and Copper Survey is repeated every three years. These results are the 90<sup>th</sup> percentile of the Lead and Copper Survey samples tested in 2017 for the Lead and Copper Rule. The 90<sup>th</sup> percentile means 90 percent of the samples had levels less than the values shown. Radioactive Contaminants are monitored once every nine years.

**\*\*Turbidity:** Turbidity is a measure of the cloudiness of water. We monitor it because it is a good indicator of water quality. High turbidity can hinder the effectiveness of disinfectants. The maximum turbidity allowable is 1 NTU for a single sample and 0.3 NTU at the 95<sup>th</sup> percentile.